

IEC320-C7 (EU)

Country of Origin: China
 RoHS: yes
 Application: For Class II. Appliances
 Approvals: ENEC

| | | |
|------------------|------------------------------|---------------------|
| Length/cord | 1.8m / 2x0.75mm ² | |
| Plug | SP-021A 2,5A/250V | |
| Connector | IS-033 2,5A/250V | |
| Rating | 300/300V 70°C | |
| Flex cord | H03VVH2-F | |
| WEIGHT / PACKING | 1pc | N.W.: 82 g / pc |
| | BOX | 200 pcs / 1box |
| | | G.W.: 17,3 kg / box |
| | | 0.55x0.36x0.20 [m] |



IEC320-C7 (UK)

Country of Origin: China
 RoHS: yes
 Application: For Class II. Appliances
 Approvals: ASTA, Singapore, ENEC

| | | |
|------------------|------------------------------|---------------------|
| Length/cord | 1.8m / 2x0.75mm ² | |
| Plug | SP-62 5A/250V | |
| Connector | IS-033 2,5A/250V | |
| Fuse | 5A | |
| Rating | 300/300V 70°C | |
| Flex cord | H03VVH2-F | |
| WEIGHT / PACKING | 1pc | N.W.: 146 g / pc |
| | BOX | 100 pcs / 1box |
| | | G.W.: 14,6 kg / box |
| | | 0.55x0.36x0.20 [m] |



IEC320-C7 (UL)

Country of Origin: China
 RoHS: yes
 Application: For Class II. Appliances
 Approvals: UL, CSA

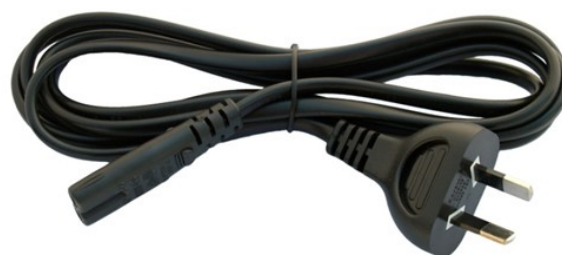
| | | |
|------------------|------------------------------|---------------------|
| Length/cord | 1.8m / 2x0.75mm ² | |
| Plug | SP-12N 7A/125V | |
| Connector | IS-033 7A/125V | |
| Rating | 300V 105°C | |
| Flex cord | SPT-1 | |
| WEIGHT / PACKING | 1pc | N.W.: 71 g / pc |
| | BOX | 200 pcs / 1box |
| | | G.W.: 14,7 kg / box |
| | | 0.55x0.36x0.20 [m] |



IEC320-C7 (Aus)

Country of Origin China
 RoHS yes
 Application For Class II. Appliances
 Approvals SAA

| | | |
|------------------|-----|------------------------------|
| Length/cord | | 1.8m / 2x0.75mm ² |
| Plug | | SP-501A 7,5A/250V |
| Connector | | IS-033 2,5A/250V |
| Rating | | 300/300V 70°C |
| Flex cord | | H03VVH2-F |
| WEIGHT / PACKING | 1pc | N.W.: 92 g / pc |
| | BOX | 125 pcs / 1box |
| | | G.W.: 12,4 kg / box |
| | | 0.55x0.36x0.20 [m] |


IEC320-C7 (Japan)

Country of Origin China
 RoHS yes
 Application For Class II. Appliances
 Approvals PSE

| | | |
|------------------|-----|------------------------------|
| Length/cord | | 1.8m / 2x0.75mm ² |
| Plug | | SP-18B 7A/125V |
| Connector | | IS-033C 7A/125V |
| Rating | | 300V 60°C |
| Flex cord | | VCTFK |
| WEIGHT / PACKING | 1pc | N.W.: 104 g / pc |
| | BOX | 150 pcs / 1box |
| | | G.W.: 16,3 kg / box |
| | | 0.55x0.36x0.20 [m] |

