

Country of Origin : China  
 Operating Temperature : 0~40 [°C]  
 Efficiency level (ErP) : VI



**GREEN MODE**      **RoHS**



**Specifications**


Model	Voltage DC [V]	Loading [A]	Max. Power [W]	Ripple / Noise [mV] p-p	Connector [mm]
SYS1588-3005-T3	5	0~6	30	120	2.1x5.5x11
SYS1588-3609-T3	9	0~4	36	120	2.1x5.5x11
SYS1588-4012-T3	12	0~3.3	40	200	2.1x5.5x11
SYS1588-4015-T3	15	0~2.6	40	200	2.1x5.5x11
SYS1588-4018-T3	18	0~2.2	40	240	2.1x5.5x11
SYS1588-4024-T3	24	0~1.6	40	240	2.1x5.5x11
SYS1588-4048-T3	48	0~0.8	40	400	2.1x5.5x11

**Features:**

Available in inlet version: C13 (T3)  
 Output connector: standard: 2.1 x 5.5 x 11mm or customer requirement | Regulated Output With Low Ripple Noise | Safety Agency Requirements and EMI/EMS Certified

INPUT   OUTPUT	<b>Voltage</b>	90-264VAC
	<b>Current</b>	1.5A max   At 100VAC & 240VAC@full load
	<b>Inrush Current</b>	40/60A max   At cold start, ambient temperature 25°C nominal AC input 100VAC/240VAC
	<b>Power consumption</b>	0.1W max. with output no load at 115VAC/230VAC input
	<b>Efficiency</b>	Meet ERP level VI
	<b>Hold up time</b>	8mS min   At AC nominal input @ output full load
	<b>Turn delay</b>	5000mS max.   At AC low line input @ output full load.
	<b>Burn-in</b>	Full load 2 Hours
PROTECTION	<b>Over current Short protection</b>	Automatic recovery
	<b>Over Voltage</b>	The power supply shall be self-recovering when the fault condition is removed
	<b>Input protection</b>	The switching adaptor use 2.0A fuse.
	<b>Protection class</b>	Class I
SAFETY	<b>CE EMC</b>	2014/30/EU
	<b>CE LVD</b>	2014/35/EU EN 62368
	<b>Safety approvals</b>	cTUVus   FCC   GS   CE   CB   RCM   SAA   PSE   EAC   UKCA   CCC
	<b>Dielectric Strength (Hi-pot)</b>	AC3000V, 10.0mA, 1 minute for type test
	<b>Leakage current</b>	5 mA max.
ENVIRONMENTAL	<b>Temperature</b>	Operating: 0~40°C / Storage: -20~50°C
	<b>Humidity</b>	Operating: 0%~90%RH / Storage: 0%~90% RH
	<b>Cooling</b>	The power supply will operate with convection cooling. Blocking of vents must not cause damage to the power supply.
OTHER	<b>MTBF</b>	MTBF shall be least 50,000 hours at 25°C (MIL-HDBK-217F)
	<b>Weight</b>	193g
	<b>Dimension</b>	93x50x33 mm
	<b>Packing</b>	50 pcs   1 box

**Mechanical case specification:**

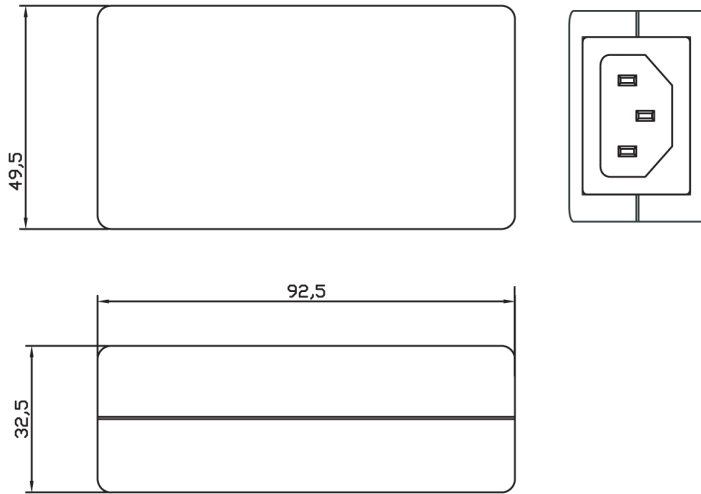

**Cable specification:**

