

Country of Origin : China  
 Operating Temperature : 0~40 [°C]  
 Efficiency level (ErP) : VI

**GREEN MODE**    **RoHS**    **EN 61558**



**Specifications**


Model	Voltage DC [V]	Loading [A]	Max. Power [W]	Ripple / Noise [mV] p-p	Connector [mm]
SYS1058-0503-W2E	3,3	0~1.5	5	200	2.1x5.5x11
SYS1058-0605-W2E	5	0~1.2	6	200	2.1x5.5x11
SYS1058-0606-W2E	6	0~1	6	200	2.1x5.5x11
SYS1058-0609-W2E	9	0~0.66	6	200	2.1x5.5x11
SYS1058-0612-W2E	12	0~0.5	6	200	2.1x5.5x11
SYS1058-0615-W2E	15	0~0.4	6	200	2.1x5.5x11
SYS1058-0619-W2E	19	0~0.33	6	200	2.1x5.5x11
SYS1058-0624-W2E	24	0~0.25	6	200	2.1x5.5x11

**Features:**

PSU housing = W2E - Europe | W3U - England | W2 - USA, Canada, Japan, Taiwan | W2A - Australia | W2C - China | W2K - Korea  
 Output connector: standard: 2.1 x 5.5 x 11mm or customer requirement | Regulated Output With Low Ripple Noise | Safety Agency Requirements and EM/EMS Certified  
 Private Label Marking Available | Modified and Custom Design Available | 2 Years Warranty

OUTPUT		CE	
Turn delay	5000ms max@AC low line input@output full load	EMC	EN 55014 EN 55014
Hold up time	8ms min@AC nominal input@output full load	LVD	2014/35/EU EN 61558
Efficiency (Normal)	>78.88%@115v/60HZ,230V/50HZ input & Full load	<b>SAFETY</b>	
Transient response (dv, tmax)	0.4V dv max At AC nominal input loading from 20%load to 80% load 16ms tmax Dynamic rise time 10 us max, duty 40ms max, Dynamic load step is slew rate of 0.5A/us	CE   GS   ETL-UL1310   FCC   RCM   PSE   CB   CCC   UKCA	
Power out.Limit	6W	<b>OTHERS</b>	
Burn in limit	Full load 2 Hours	Dielectric Strength (Hi-pot)	I/P-O/P:3000VAC
Power consumption	0.1W max. At AC nominal input@output min load	M.T.B.F	50,000 Calculated Hours at 25°C, according to the MIL-HDBK-217F
<b>INPUT</b>		Cable Length	1370mm (4.5 feet) standard cable or as required
Voltage	(90~264)VAC	PLD (power line disturbance)	Line power surge   Line voltage SAG-more info on request
Frequency	(50-60)hz	Cooling method	Natural Convection Cooling
Current	0.2A Max@AC low line input and DC output full load	Housing material	PC
Inrush Surge Current (cold start)	40/60A max@power supply cold start, ambient temperature 25°C @115Vac/230Vac nominal AC input	Temperature coefficient:	<±0.5%/°C
leakage current	0.5mA Max	<b>ENVIRONMENT</b>	
<b>PROTECTION</b>		Temperature	Operating: 0~40°C / Storage: -20~-85° °C
Over current/ Short protection	The power supply will be auto recovered when over current or short circuit faults remove (fold back). Is defined as any output impedance of less than 0.1Ω. The power supply will be auto recovered when short circuit faults remove	Humidity	Operating: 8%~90%RH / Storage: 5%~95% RH non condensing
Over Voltage	The power supply will not be auto recovered when faults remove 110%-150%. (Voltage limit)	<b>WEIGHT</b>	
Input protection	FR1:0.68/4.7/10 Ω resistance fuse The power supply shall be protected against power line surges and any abnormal condition	NW: 6.84Kg	
No Load protection	The power supply is provided with no load operation to prevent the power supply and system from damage.	GW:10.1Kg	
Protection class	II	<b>PACKING</b>	
		Box	100 pcs/1 box

**Mechanical case specification:**

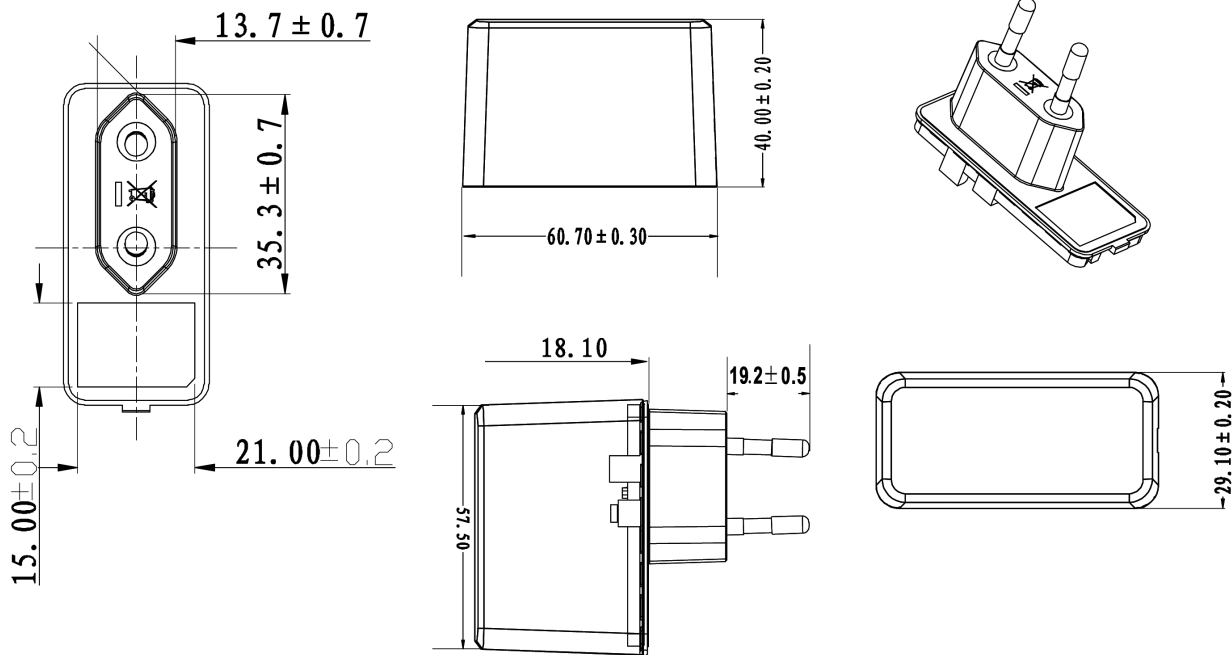

**Cable specification:**

